

● 自動焊接式球閥

Ball Valve, Automatic welding type

SPECIFICATION

Seat Material	Temp.Pange	Pressure	Leak Rates	
			Inborad	Across Seat
PTFE	-10~80°C	10kgf/cm <sup>2</sup>	≤1.0*10 <sup>-6</sup> Pa.m <sup>3</sup> /sec He	≤1.0*10 <sup>-6</sup> Pa.m <sup>3</sup> /sec He

BUTT WELD END



Model	Size	D1	L	W
V3NH-15A	1/2"	21.7	179	120
V3NH-20A	3/4"	27.2	184	120
V3NH-25A	1"	34.0	190	147
V3NH-32A	1-1/4"	42.7	198	147
V3N H-40A	1-1/2"	48.6	211	164
V3N H-50A	2"	60.5	222	164
V3NH-65A	2-1/2"	76.3	244	222
V3NH-80A	3"	89.1	257	222
V3NH-100A	4"	114.3	280	298





MATERIAL LIST

Part name	Material
BODY	CF8M
CAP	CF8M
BALL	CF8M
SEAT	PTFE
GASKET	PTFE
THRUST WASHER	PTFE
O-RING	VITON
STEM PACKING	PTFE
G L A N D	SUS304
BEVEL WASHER	SUS301
STEM NUT	S US304
LOCK SADDLE	SUS304
STEM	S US3 16
HANDLE	SUS304
HANDLE GRIP	VINYL
BOLT NUT	SUS304
BOLT WASHER	SUS304
BOLT	SUS304

BUTT WELD END

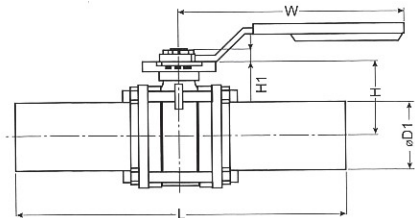

BUTT WELD END+OPP (SWG)

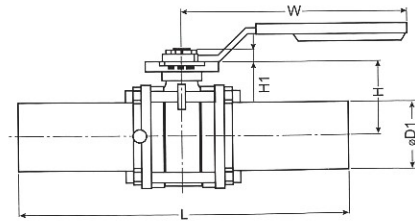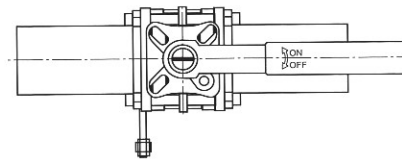

BUTT WELD END+IOPP (SWG)

